

DATEX II V1.0

USER GUIDE

Document version : 1.0

22 December 2006

European Commission

Directorate General for Transport and Energy

Copyright © 2006

Prepared by :			
	Date	Comment	Version
DATEX Technical Committee	22 / 12 / 2006		1.0

Reviewed by :			
	Date	Comment	Version
DATEX Technical Committee	22 / 12 / 2006		1.0

Approved by :			
	Date	Comment	Version
DATEX Technical Committee	22 / 12 / 2006	Authorization for publication	1.0

TABLE OF CONTENTS

1.	Introduction	6
1.1.	Objectives	6
1.2.	Document structure	6
1.3.	DATEX II reference documents.....	6
2.	DATEX II in General	8
2.1.	Background	8
2.2.	Important features	9
2.2.1.	Migration	9
2.2.2.	Platform Independent data model.....	9
2.2.3.	Data model levels : A, B, C	9
2.2.4.	Data dictionary	10
2.2.5.	XML schema	11
2.2.6.	Exchange mechanisms.....	11
2.2.7.	DATEX II Profiles	12
2.3.	DATEX II documents organisation	13
3.	Exchanged data.....	15
3.1.	Introduction	15
3.2.	Basic elements	15
3.3.	Publication of basic elements	16
4.	UML data model content.....	21
4.1.	Objectives	21
4.2.	Prerequisite	21
4.3.	Modelling methodology	21
4.4.	Data model structure	21
4.5.	Logical diagrams structure	22
4.6.	D2LogicalModel	24
4.7.	Exchange	24
4.8.	Payload	24
4.9.	Publication.....	24
4.10.	Situation publication	25
4.10.1.	Main features	25
4.10.2.	Situation record.....	25
4.10.3.	Traffic element	26
4.10.4.	Operator action	28
4.10.5.	Non road event information.....	29
4.10.6.	Special case : Publisher Push on occurrence	29
4.11.	Elaborated data publication	31
4.11.1.	Objectives and utilisation mechanisms	31
4.11.2.	Content	31
4.12.	Predefined locations publication.....	33
4.12.1.	Objectives and utilisation mechanisms	33
4.12.2.	Content	33
4.13.	Traffic View publication	34
4.13.1.	Presentation.....	34
4.13.2.	Content	34
4.14.	Measured data publication	35
4.15.	Measurement site table publication	36
4.15.1.	Objectives and utilisation mechanisms	36
4.15.2.	Content	36
4.16.	Location.....	37
4.16.1.	Important features.....	37
4.16.2.	Point location	37
4.16.3.	Linear location	37
4.16.4.	Area location	38
4.16.5.	Alert C location referencing system	38
5.	Exchange specifications	41
5.1.	Exchange reference documents.....	41
5.2.	Exchange Overview	41
5.2.1.	Logical view	41
5.2.2.	Technical view	42
6.	Interchange agreement.....	44
6.1.	Definition	44
6.2.	General	44
6.3.	Access.....	44

6.4.	Data exchange	44
6.5.	Rights and obligations.....	45
7.	Annex 1 : UML basic elements.....	47

Introduction



1. Introduction

1.1. Objectives

This document is mainly targeted towards non software personnel who wish to understand what DATEX II is. It represents an introduction and a help to understand other DATEX II documents (which can be downloaded from the DATEX II web site <http://datex2.eu>).

This document should also be of use to software developers as a reference document.

1.2. Document structure

The document is structured into 6 chapters with the following content:

- Chapter 1 “Introduction” gives a brief overview on the document objectives and structure and lists DATEX II reference documents.
- Chapter 2 “DATEX II in general” provides background information and details of important DATEX II features. It also introduces the whole set of DATEX II reference documents.
- Chapter 3 “Exchanged data” lists all possible exchanged data, introduces DATEX II terminology and presents new DATEX II concepts.
- Chapter 4 “UML data model content” presents the data model structure (packages, diagrams, classes, attributes, etc.)
- Chapter 5 “Exchange specification” explains, at a high level the exchange mechanisms and their options.
- Chapter 6: “Interchange agreement” provides help to build exchanges between a Supplier and its Clients.

1.3. DATEX II reference documents

Reference in this document	DATEX II document	Document version	Date
[Migration study]	Migration study	1.3	15/12/2005
[Modelling methodology]	DATEX II v1.0 Modelling methodology	1.0	22/12/2006
[Data model]	DATEX II v1.0 Data model	1.0	22/12/2006
[Dictionary]	DATEX II v1.0 Data definitions	1.0	22/12/2006
[XML schema]	DATEX II v1.0 XML schema	1.0	22/12/2006
[Exchange PIM]	DATEX II - Exchange mechanism (Platform Independent model)	1.01	08/02/2005
[Exchange PSM]	DATEX II v1.0 Exchange Platform Specific Model	1.0	22/12/2006
[Software developers Guide]	DATEX II v1.0 Software developers Guide	1.0	22/12/2006

DATEX II in general



2. DATEX II in General

2.1. Background

Delivering European Transport Policy in line with the White Paper issued by the European Commission requires co-ordination of traffic management and development of seamless pan European services. With the aim to support sustainable mobility in Europe, the European Commission has been supporting the development of information exchange mainly between the actors of the road traffic management domain for a number of years. In the road sector, the DATEX standard was developed for information exchange between traffic management centres and constitutes the reference for applications that have been developed in the last 10 years. With DATEX II the DG TREN now also pushes the door wide open for actors from the wider traffic and travel information sector.

Much investment has been made in Europe both, in traffic control and information centres over the last decade and also in a quantum shift in the monitoring of the Trans European Network. This is in line with delivering the objectives of the Tempo projects for safer, better-informed travellers.

Collecting information is only part of the story – to make the most of the investment data needs to be exchanged both with other centres and, in a more recent development, with those developing pan-European services provided directly to road users.

DATEX was designed and developed as a traffic and travel data exchange mechanism by a European task force set up to standardise the interface between traffic control and information centres. It has been the reference for applications that have been developed and implemented in Europe. The existing DATEX network consists of 50 to 60 operational nodes organised in different network and node types throughout Europe. The majority of nodes are used for national exchange of data, but some of them support international exchange.

The DATEX technical documents namely the data dictionary (pre-standard ENV13106:2000) and the DATEX-net specifications for data exchange (pre-standard ENV13777:2000) now need to evolve to reflect technological evolutions, the experience gained in data exchange implementations that were achieved between the European countries and the new needs that have been identified by the market.

Alongside the DATEX pre-standards, a Data Exchange Memorandum of Understanding (DATEX MoU) covering international exchange of traffic data was formally established in October 1997. The MoU confirmed in a formal manner that the development of international traffic data exchange would be based on the DATEX technical specifications, and it established an organisational framework that enabled users to influence and participate in the developments. Different organisations were created under the umbrella of this MoU.

- a **Supervisory Management Committee (SMC)** in charge of the strategic orientation of the deployment of DATEX,
- a **Technical Committee (TC)** in charge of providing technical support to the SMC.
- a **User Forum** providing the platform for DATEX users to discuss and even influence the developments within the DATEX domain.

The signatories of the current DATEX MoU decided to work on a revised MoU which is more focused on the availability of traffic and travel data to third parties.

It should be noted that many of the original signatories are participants in the Euro-Regional projects which form the EU deployment programme for ITS, known as the TEMPO Programme¹, involving more than 80 organisations from 14 Member States and three neighbouring countries.

The development of DATEX II was begun in late 2003 and has been supported and partially funded by the European Commission who see it as playing a fundamental role in the ITS domain within European states. This role now extends from traffic control centre / road authority usage to include all types of service provider usage in the ITS domain. Its data content domain is also now extended from the trunk / motorway / TERN road network to include urban network information. Thus DATEX II is aimed at a very wide user base which is far broader than that of the original DATEX specifications.

The original DATEX specifications suffered from a number of shortcomings which made it unlikely to achieve “plug and play” interoperability between DATEX nodes from different manufacturers. Updating the technology, addressing the interoperability issues and the latest stakeholder requirements were the key drivers in the development of DATEX II. DATEX II is not intended to be a

¹ EU Funding Programme 2001-2006 for the deployment of ITS (**T**rans-**E**uropean **I**ntelligent **T**ransport **S**ystems **P**rojects). The TEMPO Programme was adopted by the European Commission on 19 September 2001 as part of the Multi-annual Indicative Programme for the Trans-European transport network 2001-2006. The programme is managed by the Directorate General for Energy and Transport

rigid set of specifications, but rather one that allows a degree of choice and one that can evolve to allow stakeholders to exchange additional new types of information in the future. However, interoperability between disparate DATEX II systems is still given a high priority.

2.2. Important features

2.2.1. Migration

Because DATEX II is based on new Internet technologies and concepts of more formal data modelling there are significant migration issues for systems based on the original DATEX specifications. Migration issues are recognised as being of major importance to some stakeholders and therefore a separate study has been undertaken in relation to these issues, see [\[Migration study\]](#) document.

2.2.2. Platform Independent data model

The DATEX II development focussed on the production of a set of reference documents which make a very clear distinction between data (content) and exchange mechanisms. The main part of the work has been focused on the subject of Traffic and Travel Data Models.

As shown in figure 1, the technical description provides a very clear distinction between platform independent modelling aspects (PIM) and platform specific modelling aspects (PSM). PIM aspects are described in UML.

In each case, a clear distinction between the data modelling (referring to traffic domain) and the data exchange specifications (referring to information and communication technology) were introduced.

	Modelling of data (traffic domain)	Modelling of exchange (ICT domain)
Platform independent models (PIM)	X	X
Platform specific models (PSM)	X	X

Figure 1 – aspects to distinguish in the new descriptions

This approach has been chosen, as it provides several advantages:

The separation of these aspects provides better understanding of the standard to the users and makes it easier to apply.

The platform independent aspects can be considered as more stable than the platform (and technology) specific aspects.

The project has produced explicit models in Unified Modelling Language (UML), which define the contents of DATEX Traffic and Travel publications independent of the exchange mechanism or implementation technology.

The former DATEX specification was a 'closed' standard, i.e. a potential user could use the data concepts provided by the Data Dictionary, but if the application required data concepts that could not be found in the Data Dictionary, there was no way for this user to extend the data model without breaking the standard. Many potential users thus ignored DATEX entirely and produced non-interoperable solutions. It is one of the major requirements for the evolution of DATEX to overcome this problem.

2.2.3. Data model levels : A, B, C

The "Level A" data model

DATEX II delivers a [\[data model\]](#) also called "Level A data model" which is the result of studies on data which are shared by a lot of users in Europe.

Nevertheless, there will be situations where data concepts required by a particular user are missing in the Data Dictionary, for example because they only make sense in a National context. In this case, these users are expected to provide an extension to the model (named "level B"), that

provides the missing concepts. Users are allowed to apply a limited set of well defined UML mechanisms for these level B extensions, which then still maintain technical interoperability with standard DATEX II systems. This means that standard (i.e. level A) compliant systems will still be able to process publications generated from an extended model, of course without being able to process the extension content. Specialised clients can process the full content – including the extension – but of course can also process standard (i.e. level A) publications.

The main principle of level B is thus that users find the level A model appropriate for a large part of their publications. This may not be the case if entirely new concepts outside the scope of the level A model are introduced. In this scenario, DATEX II users are still expected to apply the modelling rules and the UML profile described in this report, which will provide them with a basic level of interoperability. These models are denoted as “level C”. Implementations that provide publications according to level C extensions can not expect to be interoperable with standard level A systems.

The extended model – “Level B” extension mechanisms

Although the “A” model is rich, over time there will always be cases where new applications, both at national and international level, will want to add additional concepts and attributes to the existing models. To cater for this future proofing aspect of the modelling it is desirable to have a formal mechanism by which the “A” model can be extended.

For these new applications requiring extensions to the “A” model, the concept of Level B compliance has been created. This will allow development of specific models that will enrich the “A” model with additional, application specific information.

These models/applications will remain interoperable with “A” model compliant suppliers/consumers: they can exchange objects structured according to these enriched models.

Suppliers/consumers that want to make full use of the information defined by these extensions to the “A” model will need additional software or metadata driven software to handle the additional application specific information.

It is anticipated that there should be a registration process for level B model extensions, whereby a registry is maintained of current approved extensions (possibly under the authority of the DATEX II TC). Once an extension achieves a major degree of consensus it would become a candidate to be absorbed into the formal DATEX II level A new version.

Using the DATEX II concepts within different contents – “Level C” Users and Models

After consideration of Level A and Level B compliance rules some users within the ITS domain may still find that there is no way that their specific data models can be accommodated. They are just too different from the Level A model or else cover completely different contents. That’s why the concept of “level C” has been created.

Level C implementations are to be considered as not compliant with the DATEX II Level A/B content models. However, they are to be compliant in all other aspects of the DATEX II specifications.

Obviously these Level C compliant systems would not be interoperable with Level A compliant systems, but at least they would use common modelling rules and common exchange protocols.

This would allow opportunities for the exchange of ideas and modelled concepts which may in the future lead to common model elements facilitated via some sort of model registration process. It will also permit many helpful software tools to be used with Level C compliant contents.

2.2.4. Data dictionary

The previous DATEX standard provided definitions which were readable by traffic engineers and IT experts alike. As the definitions for the data content in DATEX II is only stored within the UML model, which is not simply accessible for reading by non-IT professionals, a readable data dictionary is available via a software tool which automatically extracts the definitions from the UML model. The tool is accessible via the DATEX II web site (<http://datex2.eu>).

2.2.5. XML schema

Today there is a growing market and use of XML for information exchange. A fundamental part of this approach is the XML Schema. Based on a data model and a data dictionary the XML Schema is designed to fit a certain area of applications. The schema is the tool to understand the content of the exchanged data.

A conversion tool has been developed to convert the UML DATEX II data model into an [\[XML schema\]](#). The UML model is first exported from the UML modelling tool into an XMI file which the conversion tool then converts to an XML schema. The XML schema is used for development of real exchanges, by software developers.

XMI (XML Metadata Interchange) is an OMG standard for exchanging metadata information via XML. It can be used for any metadata whose metamodel can be expressed in MOF (Meta-Object Facility). The most common use of XMI is as an interchange format for UML models, although it can also be used for serialization of models of other languages (metamodels).

The following figure shows the work flow for an automated conversion process.

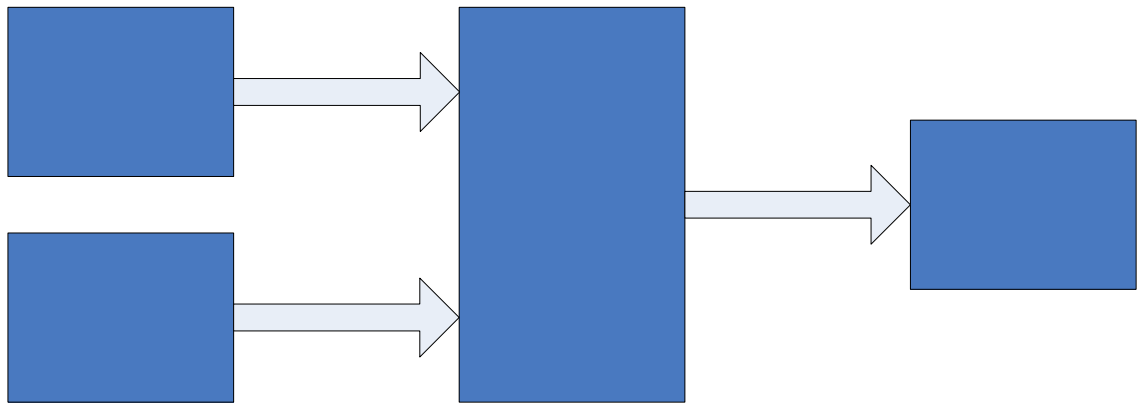


Figure 2 – UML -> XSD conversion work flow

2.2.6. Exchange mechanisms

Generally speaking, DATEX II offers a push and a pull mode for information exchange. The push mode (as in DATEX) allows the supplier to send information to the client while the pull mode allows the client to request the download of information from the supplier's systems. In detail, DATEX II provides the exchange mechanisms as described below.

At a high description level (Refer [\[Exchange PIM\]](#) document for details), without considering the notion of technical platforms, data exchange between a supplier and its client(s) can be accomplished by three main operating modes:

- Operating Mode 1 – Publisher Push on occurrence saved as XML
 - data delivery initiated by the publisher every time data is changed
- Operating Mode 2 – Publisher Push periodic
 - data delivery initiated by the publisher on a cyclic time basis
- Operating Mode 3 – Client Pull
 - data delivery initiated by the Client, where data is returned as a response.

Each Operating Mode can be both on- and offline.

For the "Client Pull" operating mode, two implementation profiles have been defined for implementing this operating mode over the Internet: by direct use of the HTTP/1.1 protocol or via Web Services over HTTP.

For the "Supplier Push" operating modes, one platform has been defined using Web Services over HTTP.

The common corresponding document, describing all operating modes and both profiles for Client Pull as well as their interoperability, is [\[Exchange PSM\]](#). saved as Config.XML

PIM and PSM exchange documents have been designed to be independent from the exchanged content (the payload). These documents can be studied without knowing the details of the UML DATEX II data model.

2.2.7. DATEX II Profiles

DATEX II allows exchange for several kinds of data via several operating modes.

Not all of those operating modes have necessarily to be implemented in every DATEX II system and not all data content need be implemented. Thus DATEX II allows the implementation of profiles.

“Profiling” aims to define a customised subset of options offered by a standard for a particular need.

What is a Profile?

A DATEX II system is composed of different publications which can be delivered with different operating modes. Each DATEX II system builder chooses to implement the subset of (publications, operating modes) he needs. This subset is called a « DATEX II profile ».

The need is to have profiles and options that allow DATEX II users to customize their implementations in order to provide more or less functionalities/facilities as necessary and not to be forced into implementing all the features.

DATEX II allows every user to define a profile according to his own requirements whilst keeping interoperability on common parts (publications, operating modes) with other users.

What must the stakeholder choose?

Because different needs for different use cases of DATEX II may lead to the definition of different profiles, this step will require close stakeholder involvement to elicit their requirements.

Moreover, profiling will require assessment of the cost/benefit trade-off, in particular of:

- standard features/services;
- implementation platforms; and
- level of service that must be achieved.


Stakeholders need to provide their own perspective, which will influence the main choices to be made concerning:

- the list of publications to be exchanged,
- the operating modes to be implemented,

and, sometimes also, options (for instance option “Web Service”/“Simple http” in the Pull operating mode 3).

2.3. DATEX II documents organisation

The organisation of the DATEX II documents is shown in the following diagram.
A documents priority depends on the reader's type (Users or software developer).
Everybody should begin with this user guide.

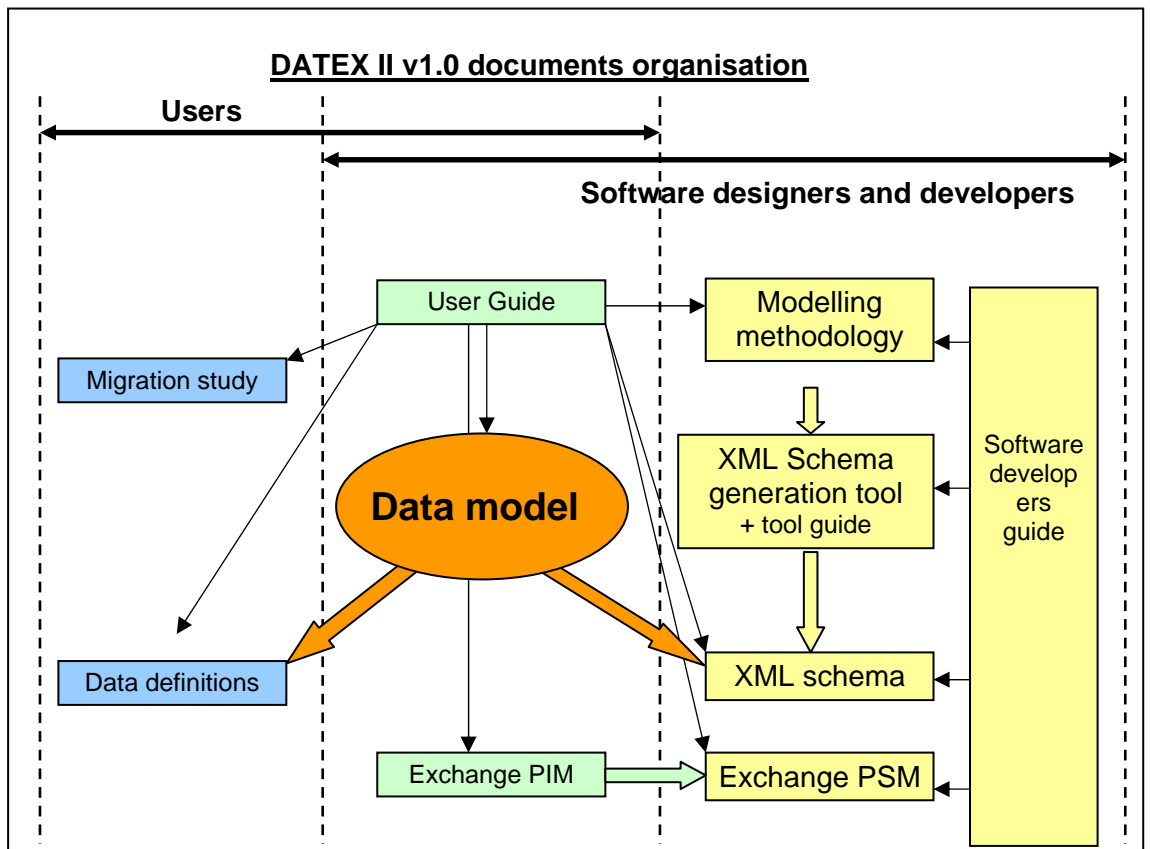

The DATEX II v1.0 Reference Set is composed of:

- Data model
- Modelling methodology
- XML schema generation tool
- XML schema
- Exchange PSM

The informative documents which are used to understand DATEX II and take main decisions are:

- User Guide
- Migration study
- Data definitions (dictionary)
- Exchange PIM
- Software developers Guide
- XML schema generation tool Guide

Exchanged data



3. Exchanged data

3.1. Introduction

Before diving into the UML model, this chapter presents the exchanged data.

Exchanged data are made with basic elements which are available inside publications.

3.2. Basic elements

Information exchanged with DATEX II systems is composed of different **basic elements**:

- Road and traffic related events (called "Traffic elements")
- Operator actions
- Advice
- Impacts
- Non road event information
- Elaborated data (derived/computed data, e.g. travel times, traffic status)
- Measured data (direct measurement data from equipments or outstations, e.g. traffic and weather measurements)

In addition there are also Predefined Locations and Measurement Site Table information exchanged. These are not part of the basic elements, but are required if the information in the basic elements is to be understood by a client.

Road and traffic related events (called "Traffic elements")

These are all events which are not initiated by the traffic operator and force him to undertake (re)actions. They are classified in 6 main categories:

- Abnormal traffic (long queues, stop and go, ...)
- Accidents
- Obstructions :
 - animal presence,
 - vehicles presence,
 - obstructions due to environment (avalanches, flooding, fallen trees, rock falls, ...),
 - obstructions due to equipments (fallen power cables, ...)
- Activities
- Incidents on infrastructure equipments (Variable message sign out of order, tunnel ventilation not working, emergency telephone not working, ...)
- Specific conditions : road conditions related to weather (ice, snow, ...) or not (oil, ...), environment conditions (precipitation, wind, ...), ...

Operator actions

Operator actions are classified in 4 main categories:

- Network management :road closure, alternate traffic, contra flow ...
 - traffic control : rerouting, temporary limits
- Roadworks: resurfacing, salting, grass cutting ...
- Roadside assistance: vehicle repair, helicopter rescue, food delivery ...
- Sign settings: variable message signs, matrix signs.

Advice

Different types of advice: speed, lane usage, winter driving ...

Impacts

It contains, in particular, delays and traffic status with 5 possible values:

- free flow,
- heavy,
- congested,
- impossible,
- unknown

Non road event information

It concerns information about events which are not directly on the road: transit information, service disruption, car parks.

Elaborated data

These sets of data are normally derived on a periodic basis by the Traffic Centre from input data for specified locations:

- travel times : elaborated time, free flow time, normally expected time
- traffic status = attribute with 5 possible values (the same as for impact) :
 - free flow,
 - heavy,
 - congested,
 - impossible,
 - unknown
- traffic values (normally published as measured data, but can be derived on a periodic basis and published as elaborated data): flow, speed, headway, concentration and individual vehicle measurements.
- weather values (normally published as measured data, but can be derived on a periodic basis and published as elaborated data): precipitation, wind, temperature, pollution, road surface condition and visibility.

Measured data

These data sets are normally derived from direct inputs from outstations or equipments at specific measurement sites (e.g. loop detection sites or weather stations) which are received on a regular (normally frequent) basis:

- traffic values: flow, speed, headway, concentration and individual vehicle measurements.
- weather values: precipitation, wind, temperature, pollution, road surface condition and visibility.
- travel times (normally published as elaborated data, but direct outstation values can be published as measured data): elaborated time, free flow time, normally expected time
- traffic status (normally published as elaborated data, but direct outstation derived values can be published as measured data) = attribute with 5 possible values (see Elaborated data above).

3.3. Publication of basic elements

The previous basic elements can be exchanged individually or grouped. For these exchanges, the notion of **publication** is used. There are 4 main publications:

- Situation publication
- Elaborated data publication
- Traffic View publication
- Measured data publication

The following table presents what can be exchanged with each publication.

	Situation publication	Elaborated Data publication	Traffic View publication	Measured Data publication
Traffic Elements	X		X	
Operator Actions	X		X	
Advice	X			
Impacts	X			
Non road event information	X			
Traffic Status		X	X	X
Travel Times		X	X	X
Traffic Values		X	X	X
Weather Values		X	X	X

Situation publication

A situation publication can contain several different situations.

A **situation** represents a traffic/travel situation comprising one or more traffic/travel circumstances which are linked by one or more causal relationships and which apply to related locations. Each traffic/travel circumstance is represented by a Situation Record.

A **situation record** is one element of a situation. It is characterized by values at a given time, defining one version of this element. When these values change, a new version is created. One situation record can be:

- An road or traffic related event (traffic element),
- An operator action,
- A non road event information,

and can contain:

- Advice,
- Impact details.

Elaborated data publication

This publication is used to send periodically elaborated data derived by a Traffic Centre relating to specified locations. Locations may be explicitly defined in the publication or, more simply, may be referred to by references to predefined locations which have been exchanged via the "predefined locations" publication.

Traffic View publication

The traffic view is a new DATEX II concept.

A traffic view is a snapshot of what happens on one itinerary, in one direction at a given time.


A traffic view is autonomous: it contains all necessary information to understand what is happening on this itinerary at the specific point in time.

There is no historical management. There is no need to manage a link failure and then recovery because, by definition, traffic view n° J cancels and replaces traffic view n° J-1.

A traffic view is organised in "oriented road sections". Each section can contain:

- Elaborated data (traffic status, travel time, delay)
- Road or traffic related events (if any)
- Operators actions (if any)

Example of traffic view display² (snapshot n° J and snapshot n° J+2)

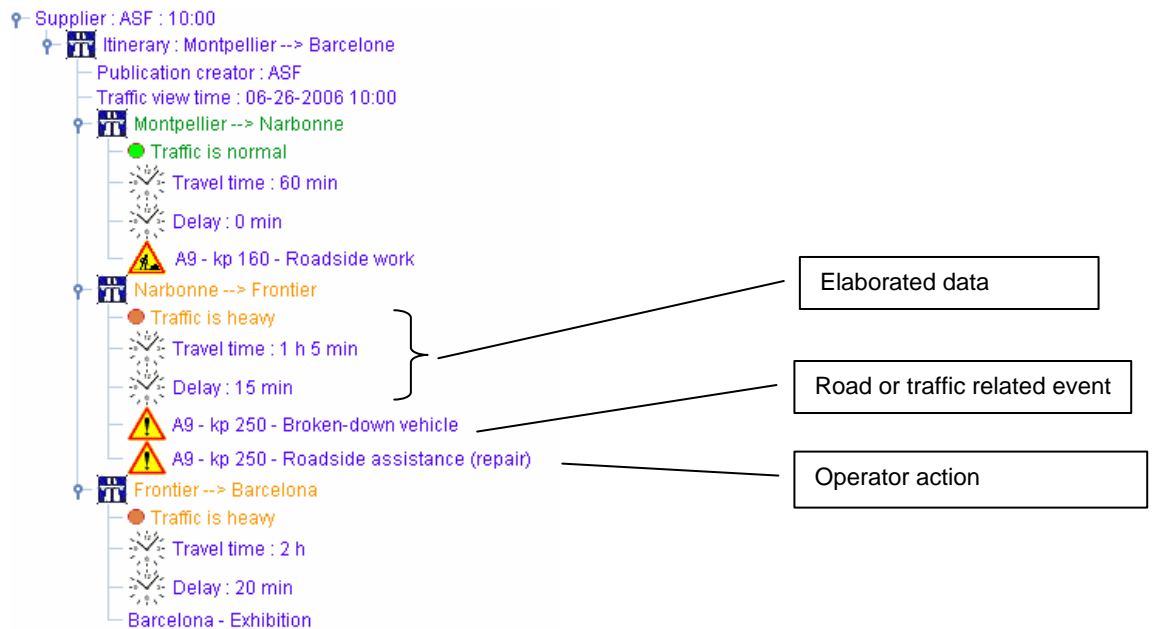

² This display is just an example in a tree representation of a traffic view and does not imply any specific traffic view requirements. Representations of traffic views can be done in many other ways and is open to implementation design.

Measured data publication

This publication is used to send periodically measured data which has been derived from equipment at specific measurement sites, where each site is identified by reference to an entry in a predefined measurement site table. The measurement site table can be exchanged via the "measurement site table" publication and provides for each site the details of its location and parameters associated with the different types of measurements that can be made at the site.

Each set of measurements from a site are ordered (i.e. indexed), where each ordered measurement may be of a different type. The order (or indexing) of these measurements for each site within the Measured Data publication must correspond with the ordered (indexed) definition of the measurement in the Measurement Site Table publication for the particular site.

UML data model content



4. UML data model content

4.1. Objectives

This chapter is intended to assist readers in understanding the structure and content of the DATEX II UML model.

When reading this document, the Data Dictionary tool and documentation which groups all definitions (classes, attributes, enumeration values ...) may also be of help.

4.2. Prerequisite

The UML model is available on the DATEX web site <http://www.datex2.eu> in an Enterprise Architect .eap file.

The reader must have one Enterprise Architect tool version installed in order to read the model (refer Sparx Systems web site: <http://www.sparxsystems.com>).

The reader should be familiar with UML modelling.

The UML basic class diagram elements used in the model are presents briefly in Annex 1.

4.3. Modelling methodology

For more details of the UML features used in the model please refer to document [[Modelling methodology](#)].

4.4. Data model structure

The model comprises several diagrams:

- Analysis diagrams,
- Dynamic diagrams,
- Functional diagrams,
- Logical diagrams.

Analysis, dynamic and functional diagrams

These diagrams were designed when the Platform Independent Model for exchange was built: see document [Exchange PIM].

To understand these diagrams, it is the best to read this document where they have been included. No further explanation on these is provided here.

4.5. Logical diagrams structure

The logical diagrams are divided in 4 packages:

- **Exchange** : contains exchange diagram and exchange enumeration definitions
- **Payload** : containing descriptions of publication data to be exchanged
- **General** : containing “general classes” : Data types, Location classes, Payload enumerations, reusable classes
- **Management** : contains, for this document version, situation management in operating mode “Publisher Push on occurrence”

The logical diagram hierarchy is as follows:

D2LogicalModel

Exchange

ExchangeEnumerations

Payload

Publication

SituationPublication

SituationRecord

Impact

Advice

ValidityPeriod

TimePeriodOfDay

TrafficElement

Obstruction

Vehicle

Accident

Vehicle

Poor road infrastructure

Conditions

OperatorAction

Roadworks

SignSetting

NetworkManagement

VehicleCharacteristics

NonRoadEventInformation

SituationManagement

Management

ElaboratedDataPublication

ElaboratedData

ValidityPeriod

TimePeriodOfDay

BasicDataValue

TrafficValue

VehicleCharacteristics

WeatherValue

PredefinedLocationsPublication
TrafficViewPublication
MeasuredDataPublication
 BasicDataValue
 TrafficValue
 VehicleCharacteristics
 WeatherValue
MeasurementSiteTablePublication
 VehicleCharacteristics
Location
 Point
 AlertCMethod2Point
 AlertCMethod4Point
 TPEGPointLocation
 Linear
 ReferencePointLinear
 AlertCMethod2Linear
 AlertCMethod4Linear
 AlertCLinearByCode
 TPEGLinearLocation
 Area
 AlertCArea
 TPEGAreaLocation

Each diagram is presented in the following paragraphs.

4.6. D2LogicalModel

At the top level the D2LogicalModel comprises two components:

- Exchange
- Payload

The Exchange class is used to exchange parameters associated with the data delivery.

The Payload sub-model comprises the various publications which contain primarily traffic and travel related data content. Some publications are also used for the exchange of static or near static tables, such as those used for location referencing or for locating static measurement equipment on a road network. However, the Payload sub-model is where all the real traffic and travel information is located.

4.7. Exchange

The Supplier Identification is mandatory (2 letters country enumeration (and “other”) plus a national identifier in that country).

When a subscription has been established between the supplier and the client(s), the corresponding class can be filled.

If the Supplier has a catalogue and if data delivery refers to catalogue references, these references can be indicated. Note that the exchange of catalogues in this version of DATEX II is not supported on-line.

If a filter has been used before data publication, filter characteristics can be indicated. Note that the exchange of filters in this version of DATEX II is not supported on-line.

The target class can be used when the payload concerns only one destination address.

4.8. Payload

One payload can contain one publication.

Each publication must have:

- its creation time “PublicationTime”,
- a publication creator which is an international identifier: 2 letters country enumeration (and “other”) plus a national identifier in that country.

4.9. Publication

There are 4 main publications:

- Situation publication
- Elaborated data publication
- Traffic View publication
- Measured data publication

There are 2 other publications, which define references used by the previous publications.

The following paragraphs detail each publication.

The location, which is used by every publication, is detailed in a dedicated paragraph, after the description of the publications.

4.10. Situation publication

4.10.1. Main features

A situation publication can group several situations.

Situation definition: An identifiable instance of a traffic/travel situation comprising one or more traffic/travel circumstances which are linked by one or more causal relationships. Each traffic/travel circumstance is represented by a Situation Record.

Warning: each situation has a unique identifier established when the situation is first created in a DATEX II's system database and keeps this identifier within that system for all its life.

If the situation has a global impact on the traffic flow, it can be indicated: "overallImpactOnTraffic".

If this situation relates to another situation, its reference can be indicated: "relatedSituation" (this reference is the "identifier" of the corresponding situation object).

A status must be given: "informationStatus" (real / securityExercise / technicalExercise / test).

With this publication, attributes can be given in the InformationHeader which provide clients with information management details (area of interest, confidentiality, usage, urgency) relating to this publication.

A situation may be composed of one or more situation records.

Special case: when the Supplier sends SituationPublication to Clients in Operating Mode 1 "Publisher Push on occurrence", the situation management has to follow different rules. This is explained in paragraph 4.10.6 : Special case : Publisher Push on occurrence.

4.10.2. Situation record

Situation record definition: An identifiable instance of a single record/element within a situation.

This class is abstract.

Each situation record has a **unique identifier**. This identifier is established when the situation record is first created in the DATEX II's system database. It keeps this identifier within that system for all its life. If the situation record is forwarded down a supply chain, each DATEX II system within that chain will assign its own unique identifier to the record when it is first creates a corresponding record in its database, but the identifier created by the original supplier in the chain may optionally be forwarded in the record's **situationRecordCreationReference attribute**.

It is located with **one group of locations** (refer "location" paragraph).

It can have **one cause**.

It can have **one impact** on the traffic (when the record type is "TrafficElement" or "OperatorAction"), qualified with:

- A trafficStatus with 4 possible values and "unknown"
 - Impossible
 - Congested
 - Heavy
 - freeFlow
 - unknown

Remark: these values are reused in BasicDataValues which forms part of ElaboratedDataPublications and MeasuredDataPublications.

- Indications on delays (code, type, value)
- Other details (capacity remaining, effect on lanes, restriction type)

Source information can be given (country, identifier, name, type, reliable)

Associated with a situation record **several types of advice** can be given, concerning:

- Speeds,
- Lane usage,
- Places
- Winter equipments

- Instructions
- Warnings
- Destination type and vehicle type
- Diversion

A situation record has a **validity period** composed of:

- One mandatory global first start time “overallStartTime”
- One optional global real end time “overallEndTime”
- Several periods, each having a start date and an end date, for which the situation record is active/valid, detailed with hours/days/weeks/months
- Exception periods, each having a start date and an end date, for which the situation record is not active/valid, detailed with hours/days/weeks/months
- An optional validity period override which, if present, overrides any validity period defined here with an “active” or “suspended” status.

Remarks for **forecasts**:

- When a record is created, with a start time in the future, it means it is a « forecast » and therefore for traffic elements, probabilityOfOccurrence should never have the value « certain ».
- When this start time arrives, the Supplier should update or end this information if it has not really occurred. If a supplier does not provide updated information at this time a client **can not** assume that the traffic element is now active, only that it was predicted to be active now.

There are 3 main categories of situation records:

- **Traffic element**: An event which is not planned by the traffic operator, which is affecting, or has the potential to affect traffic flow (note this does include events planned by external organisations e.g. exhibitions, sports events etc.).
- **Operator action**: Actions that a traffic operator can decide to implement to prevent or help correct dangerous or poor driving conditions, including maintenance of the road infrastructure.
- **Non road event information**: Information about an event which is not on the road, but which may influence the behaviour of drivers and hence the characteristics of the traffic flow.

These 3 categories are detailed in the following paragraphs.

4.10.3. Traffic element

This class is abstract.

There are 6 kinds of traffic elements:

- Obstruction,
- Abnormal traffic,
- Accident,
- Poor road infrastructure,
- Activities,
- Conditions

Obstruction: Any stationary or moving obstacle of a physical nature (e.g. obstacles or vehicles from an earlier accident, shed loads on carriageway, rock fall, abnormal or dangerous loads, or animals etc.) which could disrupt or endanger traffic.

This class is abstract.

For each obstruction type, the number of obstructions can be given.

For each obstruction type, details can be given of:

- mobility type : mobile/stationary,

There are 5 kinds of obstructions:

- Animal presence (alive or not, presence type)
- Environmental obstruction (depth, type),
- Equipment damage obstruction (type),
- General obstruction (type),
- Vehicle obstruction (type + individual vehicles characteristics)

Abnormal traffic: A traffic condition which is not normal.

Details can be given: type, number of vehicles waiting, queue length, relative traffic flow, traffic trend type.

Accident: Accidents are events in which one or more vehicles lose control and do not recover. They include collisions between vehicle(s) or other road user(s), between vehicle(s) and any obstacle(s), or they result from a vehicle running off the road.

Details can be given:

- cause type,
- accident type,
- overview of people involved (number, injury status, involvement role, type),
- overview of vehicles involved per type (number, status, type, usage),
- details of involved vehicles (type + individual vehicle characteristics)

Poor road infrastructure: Failures or malfunctions of road infrastructure or related equipment.

The type must be given.

Details can be given of malfunctioning traffic control equipments: equipment type, number of traffic control equipments per type

Activities: Deliberate human actions external to the traffic stream or roadway which could disrupt traffic.

Details can be given of: types of authority operations / disturbance / public event, and mobility type: mobile/stationary

Conditions: Any conditions which have the potential to degrade normal driving conditions.

A general indicator can be given with 8 possible values “**drivingConditionType**”:

- impossible,
- very hazardous,
- hazardous,
- passable with care,
- winter conditions (driving conditions are consistent with those expected in winter),
- normal,
- other,
- unknown.

There are 3 conditions categories:

- road surface conditions that are related to the weather which may affect the driving conditions, such as ice, snow or water,
- road surface conditions that are not related to the weather but which may affect driving conditions,

- environment conditions which may be affecting the driving conditions on the road (precipitation, visibility, pollution, temperature, wind)

4.10.4. Operator action

This class is abstract.

For each operator action type, details can be given of:

- Origin : internal / external,
- Status : requested, approved, in progress, implemented, over,
- Indication of whether the action is provisional, i.e. the action is subject to change.

There are 4 kinds of operator actions:

- Roadworks,
- Sign setting,
- Network management,
- Roadside assistance.

Roadworks: Highway maintenance, installation and construction activities that may potentially affect traffic operations.

This class is abstract.

The effect on road layout is mandatory.

Details can be given of:

- duration,
- scale : major / medium / minor
- under traffic or not,
- urgent or not,
- mobility type : mobile / stationary,
- construction work type : blasting / construction / demolition,
- road maintenance type,
- subject type of works,
- information on associated maintenance vehicles.

Sign setting: Provides information on variable message and matrix signs and the information currently displayed.

This class is abstract.

Network management: Changes to the configuration or usability of the road network whether by legal order or by operational decisions. It includes road and lane closures, weight and dimensional limits, vehicle restrictions, contra-flows and rerouting operations.

The type of network management must be given.

Details can be given of:

- Restrictions
 - Mandatory or “not allowed” winter equipments,
 - The minimum number of persons in a vehicle required to satisfy a traffic restriction or a special fare condition,
 - Sequential ramp number
- Vehicles characteristics for which the network management applies,
- Traffic control details (advisory/mandatory, traffic control type)
 - Rerouting information (when it is only suggested, use trafficControlOptions with “advisory” value),

- o Temporary limits (they concern all vehicles if VehicleCharacteristics class is not filled)

Roadside assistance: Details of road side assistance required.

The road side assistance type can be given: food delivery, helicopter rescue, vehicle repair ...

4.10.5. Non road event information

This class is abstract.

There are 3 kinds of non road event information:

- Availability of transit services and information relating to their departures. This is limited to those transit services which are of direct relevance to road users, e.g. connecting rail or ferry services.
- Service disruption information: fuel shortage, service area closed, some commercial service closed etc.
- Information on car parks: number of vacant spaces, fill rate etc.


4.10.6. Special case : Publisher Push on occurrence

Exchanges between Suppliers and Clients can follow different modes.

For one of these, "Operating mode 1: Publisher Push on occurrence, data delivery is initiated by the publisher, every time data is changed.

In this operating mode, the life cycle of exchanged entities has to be managed (creation, update... end) and follow precise rules. These rules are defined in the "**Management**" package of the UML model and reachable via 2 diagrams:

- **Situation management** diagram

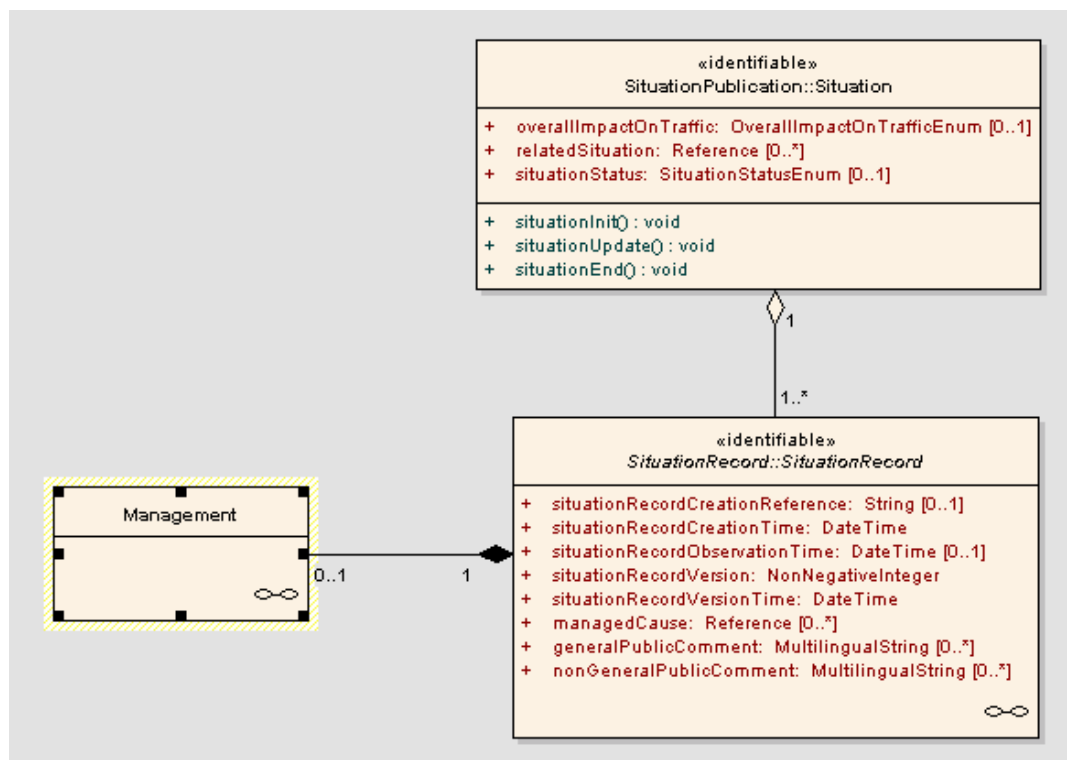


In this diagram, 3 operations are visible on the Situation class. These operations are to be implemented in a DATEX II client:

- o **situationInit** : The situation creation is done automatically upon the reception of a situation record, for the first time, for this situation.
- o **situationUpdate** : On updating the state of an existing situation, alterations may be made by means of creating an additional new situation record or by updating the information within an existing situation record.

- o **situationEnd** : A situation is ended when all of its situation records have been ended (refer LifeCycleManagement description).
Remark : a situation can be ended on the Client's side when all of its situation records are not active any more. A situation record is not active when is has been ended or the validityEndTime has been reached (refer SituationRecord description).

- **Management** diagram

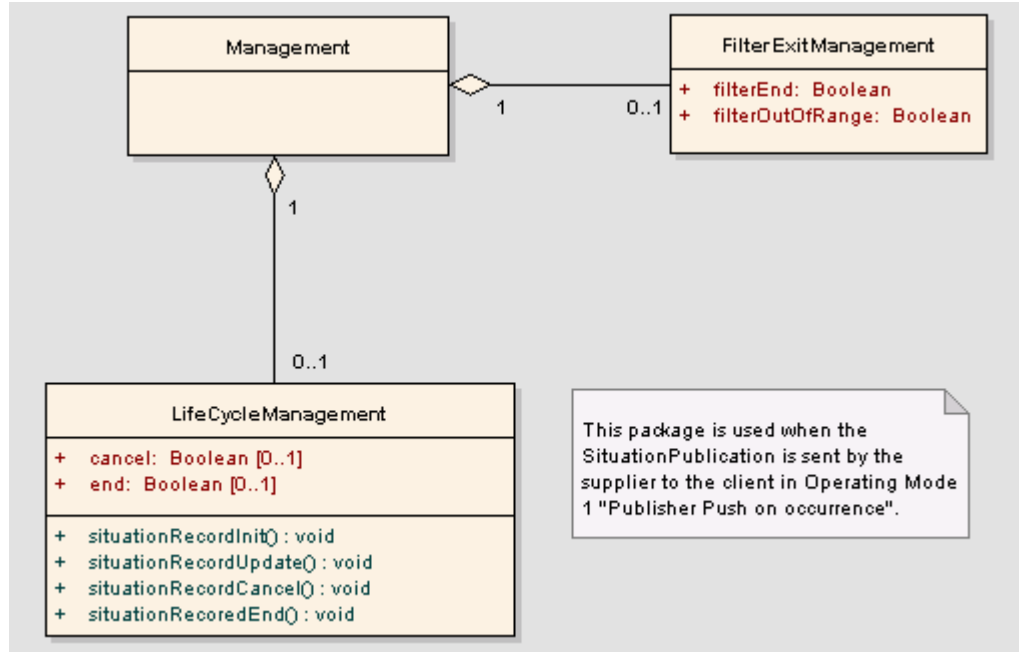

In this diagram :

- 4 operations are visible on the LifeCycleManagement class. These operations are to be implemented in a DATEX II client:
 - o **situationRecordInit** : Initialises the first version of the record.
 - o **situationRecordUpdate** : Updates situationRecord information.
 - o **situationRecordCancel** : A situation record should be cancelled using the "cancel" attribute set to "true". In this case, part or all of the information previously sent for this record was wrong, all information previously sent must be considered as not valid anymore. If the supplier has new valid information, this should be put in the same publication. If the supplier now considers this record's existence as an error, the supplier must end it with the end attribute set to true.
 - o **situationRecordEnd** : A situation record should be ended using the "end" attribute set to "true".
Remark : a situation record can be invalidated by use of the validityEndTime : refer to the notes on this attribute.
- in FilterExitManagement class, 2 attributes are defined :
 - o **filterEnd** : this attribute, set to true, indicates that the filter, for which a previous record version has been published, has become inactive,
 - o **filterOutOfRange** : This attribute is set to true when a previous version of this record has been published and now, for this new record version, the record goes out of the filter (example : the traffic jam length was 6 km and was sent, the filter threshold is currently set at 5 km, and the new version is 3 km => the value « 3 km » must be published with filterOutOfRange=true).

4.11. Elaborated data publication

4.11.1. Objectives and utilisation mechanisms

This publication is used to give information that is in some way elaborated or derived. Typically this is data which has been elaborated by a traffic centre from input data held in its database.

4.11.2. Content

This publication contains one or more elaborated data sets.

With this publication, attributes can be given in the InformationHeader which provide clients with information management details (area of interest, confidentiality, usage, urgency) relating to this publication.

A set of default values for “forecast” “period” and “time” can be provided to clients which are applicable throughout the publication if no others are provided at the detailed level. This helps in minimising the size of publications where large numbers of values are sent which share common parameters.

Also to assist in minimising the volume of required values to be sent for traffic status covering wide expanses of a road network, ReferenceSettings can be provided to a client. ReferenceSettings comprise a reference to a predefined set of locations (see Predefined Locations publication) and a default value that can be assumed by a client for the traffic status at all these locations if none is received. Thus a supplier only needs to send values of traffic status for those locations which deviate from this default value.

Each elaborated data item has a **unique identifier**.

Source information can be given (country, identifier, name, type, reliable)

A **validity period** can also be given (as for situation records) composed of :

- One mandatory global first start time “overallStartTime”
- One optional global real end time “overallEndTime”
- Several periods, each having a start date and an end date, for which the elaborated data is active/valid, detailed with hours/days/weeks/months
- Exception periods, each having a start date and an end date, for which the elaborated data is not active/valid, detailed with hours/days/weeks/months

It can be indicated if the elaborated data is a forecast.

Each elaborated data item comprises a **Basic Data Value**.

Basic data value is a general class which has the following attributes

- Accuracy
- Computational method
- Fault
- Number of incomplete inputs
- Number of input values used
- Period (in seconds)
- Smoothing factor
- Standard deviation
- Supplier calculated data quality
- Time, the time when basic data value was measured or elaborated.

Each Basic Data Value can have an affected location. Affected location is **one group of locations** (refer “location” paragraph). Generally, this group of locations is identified by reference, refer following paragraph concerning predefined locations.

Basic Data Values are of one of the following types:

- Travel Time
- Traffic Status

- Traffic Value
- Weather Value

The following paragraphs describe each of these basic data value types:

Travel Time Value. It the following specific attributes:

- Travel time (in seconds)
- Travel time trend type : decreasing, increasing, stable
- Travel time type : best, estimated, instantaneous, reconstituted
- Free flow travel time
- Free flow speed
- Normally expected travel time
- Vehicle type for this travel time.

Traffic Status Value. It has the following specific attributes:

- Traffic status : Impossible, congested, heavy, free flow, unknown
- Traffic trend type : traffic building up, traffic easing, traffic stable, unknown.

Traffic value (usually sent as Measured Data, but may also be sent as Elaborated Data). It is structured as follows:

Traffic values can be classified on the basis of Vehicle characteristics.

There are 5 kinds of traffic values:

- Traffic headway
- Traffic flow
- Traffic Speed
- Traffic concentration
- Individual vehicle measurements.

Weather value (usually sent as Measured Data, but may also be sent as Elaborated Data). It is structured as follows:

There are 6 types of weather values:

- Precipitation information
- Wind Information
- Temperature Information
- Pollution Information
- Road Surface Condition Information
- Visibility Information.

4.12. Predefined locations publication

4.12.1. Objectives and utilisation mechanisms

This publication is used to predefine a set of locations which can then be referred to in any of the other publications by means of a single reference attribute. This allows for great simplification of those publications where repeating static or quasi-static locations are used, such as in Elaborated Data publications and Traffic View publications.

Each predefined location may be of any type, i.e. point, linear or area. Each set of predefined locations and each individual predefined location has its own unique identifier and can be referenced in other publications.

The main utilization is when publications are sent periodically and always concern the same locations which are mostly itineraries or elementary linear locations (for instance, elaborated data and traffic views publications).

The utilization mechanism is as follows :

- Step 1 : the DATEX II client gets a predefined location publication with the locations identifiers and definitions,
- Step 2 : when the DATEX II Supplier delivers publications to this client, it only uses the predefined location identifiers and the client is able to look up the identifier and obtain the real location details.

The advantage of this mechanism is to reduce the publication size.

When a predefined location set is modified, the DATEX II Supplier has to inform the concerned DATEX II Clients.

4.12.2. Content

With this publication, attributes can be given in the InformationHeader which provide clients with information management details (area of interest, confidentiality, usage, urgency) relating to this publication.

The **predefined location set** has a **unique identifier** and can have a **name**.

This set is made up of **predefined locations**, each location has its own unique identifier and can have its own name.

The definition of each predefined location uses the same location definition as the other publications (refer paragraph : "Location"). When predefining these locations, usage of other references is not authorized.

4.13. Traffic View publication

4.13.1. Presentation

A traffic view is a snapshot of what happens on one itinerary, in one direction at a given time.

Before reading this paragraph, read paragraph 3.3 : Publication of basic elements, where this publication is presented.

4.13.2. Content

With this publication, attributes can be given in the InformationHeader which provide clients with information management details (area of interest, confidentiality, usage, urgency) relating to this publication.

A traffic view publication contains one or more **traffic views**.

Each traffic view has a **time** and refers to a **predefined location set**.

Each traffic view is organised in successive **linear traffic views**.

Each linear traffic view has a unique identifier and refers to a **linear predefined location**

Each linear traffic view can contain one or more **traffic view records**.

Each traffic view record can be made of :

- A traffic element (refer to the situation publication section)
- An operator action (refer to the situation publication section)
- Elaborated data (refer to the elaborated data publication section)
- A reference to a camera image on the corresponding linear location.

4.14. Measured data publication

This publication contains measurements from one or more sites.

With this publication, attributes can be given in the InformationHeader which provide clients with information management details (area of interest, confidentiality, usage, urgency) relating to this publication.

The measured data publication must contain a reference to the measurement site table used.

Each set of site measurement values must always contain a reference to the measurement site and a measurementTimeDefault which is the default time for each measured value if no other time is specified for an individual measurement.

Each set of site measurements has an ordered (indexed) list of measured values, where the order (index) corresponds with the measurement definition order (index) in the Measured Site table. So there is no need for any further identification for each measured value. The values that are measured are referenced by the index in the ordered list of values for that site.

A **measured value** can identify the type of measurement equipment used.

A measured value can also have a Location characteristics override. This is used to override the predefined lanes attribute and to indicate a reversal of flow compared with that defined in the Measurement Site table.

Each measured value comprises a **Basic data value** which may be one of the following types:

- Travel Time
- Traffic Status
- Traffic Value
- Weather Value

Basic data value is a general class which has already been described in the Elaborated Data section above. However the following points are of note for its use in the Measured Data publication:

- The point at which the measurement equipment is located (i.e. the site) is defined in the appropriate entry in the Measurement Site table. However, if the measurement relates to a section of road or a group of locations (e.g. ANPR which determines measurements over a stretch of road) this can also be provided in the "affectedLocation" which is an aggregation associated with the BasicDataValue.
- TrafficStatusValue and TravelTimeValue are normally provided as Elaborated data, but may be provided as Measured data if appropriate (e.g. because values are provided by an outstation).

4.15. Measurement site table publication

4.15.1. Objectives and utilisation mechanisms

The Measurement Site Table publication is used to provide information relating to predefined measurement sites and the measurements that can be made at those sites. The sites and the details of their measurement characteristics are seen as static or quasi static (i.e. they seldom change).

The measurement site details and their measurement characteristics are referenced by Measured Data publications which enables these publications to be efficient when large volumes of measured data values need to be conveyed.

4.15.2. Content

This publication contains one measurement site table.

With this publication, attributes can be given in the InformationHeader which provide clients with information management details (area of interest, confidentiality, usage, urgency) relating to this publication.

The **Measurement Site table** has a **unique identifier** and can have a reference and a version.

The Measurement Site table has a list of **Measurement site records**, each corresponding to a single measurement site.

Every Measurement site record has the following attributes:

- Computation method
- Measurement equipment reference
- Measurement equipment type used
- Measurement site name
- Measurement site number of lanes
- Measurement site reference
- Measurement side

The Measurement site record always has a single **Location**.

Every site record must also have an ordered list of **Measurement specific characteristics**. This ordered (indexed) list of characteristics relates to the types of measurements that can be made at that measurement site. The ordering is significant because this order (indexing) is used in the Measured Data publications to distinguish between the different measurements received from the referenced site.

Measurement specific characteristics contains information about:

- Accuracy
- Period
- Smoothing factor
- Specific lane
- Specific measurement value type.
- Specific vehicle characteristics

These values are seen as static for the particular measurement at the site and do not have to be repeated for each measured value in the Measured Data publications, unless they need to be overridden in particular cases (see Measured Data publication section).

4.16. Location

4.16.1. Important features

With DATEX II:

- information can be located with one group of locations where each location must be physically different,
- each individual location can be defined with several location referencing systems (Alert-C, XY, TPEG-Loc, ...): for interoperability, the Supplier and its Clients MUST use at least one common location referencing system which is a result of an interchange agreement (refer paragraph to [Interchange agreement](#)),
- the group of locations and each location can be expressed by references defined in the Predefined Locations Publication,
- A location can correspond to the road network (point or linear) or to an area,
- A group of locations can relate to several destinations, each being a point or an area,
- When the location is on the network, supplementary positional description information can be given (e.g. characteristics at the lane level, ...)

4.16.2. Point location

Several location referencing systems can be used. At least one must be present :

- Point by coordinates (ETRS89 / WGS84) : latitude, longitude plus optional bearing
- Reference Point : Reference Point identifier + details (road name, direction, ...).
Example : roadName="Highway E1", referencePointIdentifier="58", referencePointDistance = 35700 m; directionRelative=P (same coding as Alert C for direction)
- Alert C Point : country code, table number and version, plus :
 - Mandatory code and Alert C direction and optional name (Method 2)
 - Plus offset distance (method 4)

The Alert C location referencing system is presented in a separate paragraph.

- TPEG Point Location

A TPEG point location has direction (e.g. northbound, eastbound, clockwise ...) and is either specified as:

- a simple point on the road network at a junction or a non-junction
- or
- a framed point on the road network between two other points (i.e. framing points) on the road network.

Each point (simple point, framed point or framing point) is defined by its latitude and longitude coordinates (ETRS89 / WGS84) which may be at a junction or between junctions. Each is further elaborated by one or more textual descriptors of prescribed type (e.g. name, ILCs ...).

4.16.3. Linear location

Several location referencing systems can be used. At least one must be present :

- Reference Point linear location : reference point for primary point plus reference point for secondary point
- Alert C linear : country code, table number and version, plus :
 - Mandatory linear location code and Alert C direction and optional name (method linear by code) or
 - Mandatory primary code, secondary code and Alert C direction and optional names (Method 2), plus offset distances (method 4)

The Alert C location referencing system is presented in a separate paragraph.

- TPEG Linear Location
 - A TPEG point location identifying the “from” point and another TPEG point location identifying the “to” point, where the “to” point is downstream from the “from” point.
 - A direction (e.g. northbound, eastbound, clockwise ...)
 - A fixed location type of “segment”

4.16.4. Area location

Several location referencing systems can be used. At least one must be present :

- Alert C area : country code, table number and version, plus :
 - Mandatory area location code and optional name

The Alert C location referencing system is presented in a separate paragraph.

- TPEG Area Location

A TPEG area has a type of either “largeArea” or “other” and optional height information and height type (e.g. above sea level...). It is further specified either as:

- A “named only” area (i.e. by a name and a descriptor type, e.g. county name, town name...)
- or
- A geometric area comprising a centre point (defined by ETRS89 / WGS84 latitude and longitude), a radius and an optional “named area”.

4.16.5. Alert C location referencing system

This section describes the Alert C referencing system and gives details of the contents of Alert C tables. Since this version of the DATEX II specification does not include the exchange of Alert C Location tables this is provided as general support information.

Recall: An Alert-C localization is a tabular address defining a locating element belonging to this table.

Only the reference is transmitted between the Supplier and the Client. It is up to the client to look in the table for the descriptive elements corresponding to the referenced location using the Alert C code. To have a unique Alert C coding at the European level, the referencing must comprise three elements (triplet) :

- Country Code,
- Table number,
- Location number

Two distinct locations at the European level cannot have the same triplet.

Caution: currently certain codes for country table references were not allotted; they are thus invalid.

It is the European standard EN ISO 14819-3 which defines the rules of constitution of the Alert C location tables.

The following table gives indications on the contents of the various common attributes used by the classes related to the Alert C location :

Code	Definition	Possible values
alertCLocation CountryCode	Country code defined by RDS (IEC 62106). It uses only 15 values (1 hexadecimal digit: 1 to 9 and A to F). It doesn't identify a specific country because some values are shared by different countries.	F (France) 1 (Germany) E (Spain) 5 (Italy) etc...
alertCLocation TableNumber	Number allowed for a country CountryCode + TableNumber fully identifies the table	17 to 32 (France) 17 to 24 (Spain) 1 to 16 (Italy) etc ...
alertCLocation TableVersion	Version number of the Alert-C location table in a country.	
alertCDirection	It is the concerned direction. Positive direction	both

Coded	corresponds to the direction used when following positive linkage in the table	negative positive unknown
alertCDirection Named	String for the direction name	
alertCDirection Sense	Indicates for circular routes the sense in which navigation should be made from the primary location to the secondary location, to avoid ambiguity. The value TRUE indicates the positive RDS direction which is the direction of coding of the road.	true (Alert C positive direction) false (Alert C negative direction)
alertCLocation Name	Location name (redundant because already in the table)	
offsetDistance	The non negative offset distance from the Alert C referenced point to the actual point.	
specificLocation	Unique code within the Alert C location table which identifies the specific point, linear or area location.	Number between 1 and 63487

AREA

In an Alert C location table an area location includes a name and its type can be found starting from the contents of the location table.

It can be used to locate certain surface phenomena like weather phenomena. It can also be used to provide an indication of the destination (when it corresponds to a city for example).

POINT

A point will be used to locate certain phenomena where dimension length is negligible such as for example accidents, incidents (broken down vehicles), obstacles, Datex II proposes two methods of localization for the points, called method 2 and method 4 (the previous DATEX method 1 and method 3 have been abandoned) :

- In method 2, the point is defined by the tabular address of the Alert C point;
- In method 4, the point is defined by the tabular address of the Alert C point, supplemented by the distance between this Alert-C point and the point to be located.

In an Alert C location table an Alert-C point includes a type and a point name as well as the name of intersecting roads at the point. Moreover, a reference towards the road (or the segment of road which carries it) is systematically added to the point and makes it possible to attach the name/number of road to this point. Consequently all points are attached to a road (and only one).

LINEAR

Linear will be used to locate certain phenomena or operator actions where dimension length is relevant, such as for abnormal traffic flow (queues, ...), the bad condition of the roads (e.g. road surface), ...

Datex II proposes three methods of localization for linear :

- In method 2, the linear one is defined by two points (primary location and secondary location), each point being defined only by the tabular address of the corresponding Alert C point;
- In method 4, the linear one is defined by two points (primary location and secondary location), each point being defined by the tabular address of the corresponding Alert C point, supplemented by the distance between this Alert C point and the end of the linear location.
- In method "linear by code", the linear is defined only by the tabular address of the corresponding linear Alert C location (road, street or segment).

The primary location is the nearest defined downstream point (for methods 2 or 4).

In an Alert C location table an Alert C linear location includes a type, the names of the origin and end of linear section as well as the name/associated road number.

Exchange specifications



5. Exchange specifications

5.1. Exchange reference documents

For DATEX II, one of the objectives was to clearly split the content data modelling and the data exchange specification.

Two documents deal with data exchange :

- A high level document, called here [**Exchange PIM**], which is independent from technological platforms and presents, definitions, subsystems, use cases, meta data, and operating modes.
- A detailed specification, called here [**Exchange PSM**], which is specific for one platform which has been chosen to be for DATEX II, "Web Services over http".

These documents which contain the details on the exchange process may not be of direct interest for stakeholders who only want to know the main exchange features and the main options they have to decide. This chapter provides a brief overview of what DATEX II exchanges comprise.

5.2. Exchange Overview

5.2.1. Logical view

An exchange system between a Supplier and its Client(s) is composed of 2 main subsystems :

- A **Publisher** subsystem, which makes data available and creates the payload publications,
- A **Delivery** subsystem, which adds exchange specific information and performs the physical delivery.

The DATEX II exchange specification only describes the delivery subsystem.

A **subscription** specifies the payload type to be exchanged. It can be defined by the Supplier or by the Client, online or offline. DATEX II allows users to have the liberty to develop subscriptions with the refinements they need.

There are 3 possible **operating modes** for data delivery :

1	Publisher Push on occurrence	Data delivery is initiated by the Publisher every time data is changed
2	Publisher Push periodic	Data delivery is initiated by the Publisher on a cycle time basis
3	Client Pull	Data delivery is initiated by the Client and data is returned as a response

Remarks :

- operating mode "Publisher Push on occurrence" :
 - in this mode, for situation publications (events, operator actions, ...), situation and situation records lifecycles have to be managed (update, cancel, and end). This is described in paragraph 4.10.6 : "Special case : Publisher Push on occurrence",
The main advantage of this mode is the response time (which can be measured in seconds).
- operating modes "Publisher Push on occurrence and Publisher Push periodic" :
 - after a link failure between the Supplier and his Client(s), recovery mechanisms have to be built (refer to [Exchange PSM]).

Depending on operating mode and publication type, different **update methods** are possible :

singleElementUpdate	If an atomic part of the data has been changed, this atomic part, and only this atomic part, will be exchanged (e.g. only a single situation record update in a multi element situation)
allElementUpdate	If an atomic part of the data has been changed, all data associated with the atomic part will be exchanged (e.g. all situation records in a multi element situation)
snapshot	A snapshot contains all information available, at a given time, for a subscription

Remarks :

With "Client Pull " operating mode :

- only "snapshot" update method is used,
- for situations publication, there is no need to manage situation and situation records lifecycles because the exchanged situations are only the active ones at the time of the snapshot (i.e. in the last received exchange),
- after a link failure, no recovery mechanism is needed (the first Pull automatically gets the latest versions).

OPTIONS : depending on his needs, a stakeholder has to decide, at this logical level :

- The refinement of subscriptions, from the "exchange everything" to sophisticated filtering,
- The operating modes he wants to implement (as Supplier and/or as Client), the Pull operating mode being the more simple to develop,
- The update methods he wants to implement, if he uses Publisher Push operating modes

5.2.2. Technical view

At this technical level, we distinguish 2 kinds of systems :

- Pull systems,
- Push systems

Pull systems

- Supplier : it can use either :
 - Web services over http, with DATEX II WSDL description,
 - Only a http server.
- Client : it can use either :
 - Web services over http, with DATEX II WSDL description,
 - Basis http requests, either GET or POST.

Push systems

- Supplier : it uses Web services over http, with DATEX II WSDL description,
- Client : it uses Web services over http, with DATEX II WSDL description.

OPTIONS : depending on his needs, the stakeholder has to decide, at this technical level, for the operating modes he has chosen :

- for Pull supplier systems, the usage of Web Services technologies and tools or basic http technology,
- for Pull client systems, the usage of Web Services technologies and tools or basic http technology.

Remark : specialists don't agree on the solutions which have the lowest cost for a Pull system : Web Services technology or basic http technology, the choices depend essentially on general policy for software development.

Interchange agreement



6. Interchange agreement

6.1. Definition

The interchange agreement is a document that describes bilateral agreements between a Supplier and a Client, needed for the exchange of DATEX II information. The interchange agreement should deal with all the information that is needed for the data exchange to take place. The description assumes that the information exchange follows the basic principles of DATEX II. Specifically it is assumed that two parties are involved: a Supplier providing content and a Client receiving content.

6.2. General

Time period throughout which the overall agreement is valid

The agreement shall state the time period for which the agreement is valid. It should define the date of commencement and may indicate the date of its ending.

Rules for terminating the agreement before the expiry time of the agreement

The agreement should specify the conditions under which the contract can be terminated prior to an expiry date.

Company/authority names, contact addresses, telephone, fax and E-mail details

The two parties shall provide the company and the authorities' names, address and the operational contact with all related communication data such as telephone, fax numbers and email addresses.

6.3. Access

IP Address of the Client

The agreement may mention the IP address of the client which is to be used if the supplier is to implement IP address discrimination.

IP Address of the Supplier

The agreement shall mention the IP addresses on which the supplier's services will be available. Each suppliers service may have different applicable conditions associated with it.

Supplier user name

The agreement should stipulate the user name that will be adopted by the supplier.

Client user name

The agreement should stipulate the user name that will be adopted by the client.

Password for Supplier to connect to Client

If the parties decide to use a password, this should be specified. If other means of access control are used these should be specified.

Password for Client to connect to Supplier

If the parties decide to use a password, this should be specified. If other means of access control are used they should be specified.

6.4. Data exchange

Choice of network for exchange of data and configuration

All technical information needed for the exchange of data and configuration between the parties should be described (Example: VPN details, router parameters, ...).

Options

The choices made by the supplier and the client have to be compatible:

- DATEX II model version and any extension,
- Operating mode,
- Update method

Location referencing systems

The choices made by the supplier and the client have to be compatible.

When using Alert-C tables, they have to be exchanged first between the Supplier and the Client and kept compatible when they are updated.

6.5. Rights and obligations

Description of the quality of the data provided by Supplier.

Description of actions by Supplier in connection with the Supplier Server being down:

- actions when Supplier Server is down for planned maintenance,
- actions when Supplier Server is down following a system failure,
- actions when Supplier server starts up.

Description of actions by Client in connection with the Client system being down:

- actions when Client system is down for planned maintenance,
- actions when Client system is down following a system failure,
- actions when Client system starts up.

Description of payment mechanism for the service, if any.

Statement on liability in case of transmission of incorrect information.

Rules for the further dissemination by the Client of information received using DATEXII.

Annexes



7. Annex 1 : UML basic elements

The following table shows a short description of UML 2.0 basic elements used by DATEX II. A full definition and specification can be found in UML reference documents.

Element type	Element	Description
Class	<p>The diagram shows a class box with a title bar 'cd Introduction'. Inside, there are three horizontal compartments. The top compartment contains the text 'Class'. The middle compartment contains '+ Attribute: type'. The bottom compartment is empty.</p>	<p>A class is a template for a given data element which can contain attributes. It is a rectangle divided into three compartments. The topmost compartment contains the name of the class. The middle compartment contains a list of attributes owned by that class and the bottom compartment contains a list of operations which is not shown here because operations are not used in this standard. In some diagrams, the bottom compartment of Attributes may be omitted for clarity reason. An attribute line has a specifier "+, # or -" for the visibility (not used in this standard) a name of the attribute and after a colon a data type and in squared brackets the multiplicity which is described in aggregation hereunder.</p>
Specialisation	<p>The diagram shows two class boxes. The top box is labeled 'Super Class' and the bottom box is labeled 'Derived Class'. A solid line connects the bottom of the Super Class box to the top of the Derived Class box, ending in an open arrowhead pointing towards the Super Class box.</p>	<p>A Specialisation (i.e. Inheritance) defines a general class (super class) which properties are inherited from the derived class. In data structures that implies that the derived class has at least the same attributes as the super class and normally will define more attributes to it. Reason for using an inheritance in general is the capability of having different specialisations from one super class.</p>
Aggregation	<p>The diagram shows two class boxes. The top box is labeled 'Class' and the bottom box is labeled 'Aggregated Class'. A solid line connects the bottom of the Class box to the top of the Aggregated Class box, ending in an open diamond shape at the Class box end. The line is labeled '+role name' on the left and 'multiplicity' on the right.</p>	<p>The aggregation is a more explicit design element for describing attributes, It is a more strong association telling that the class on the side of the diamond "has" an instance of the aggregated class. The name of that instance is given on the left side of the connection and starts again with the "+" as specifier of visibility. On the right side the multiplicity of that instance is given as a range of the allowed count of occurrences. An aggregation does let open if the aggregated element has the same lifetime as the aggregating class. In data structures the aggregation can be a reference to another data structure or an embedded data element.</p>
Composition	<p>The diagram shows two class boxes. The top box is labeled 'Class' and the bottom box is labeled 'Composed Class'. A solid line connects the bottom of the Class box to the top of the Composed Class box, ending in a filled diamond shape at the Class box end. The line is labeled '+role name' on the left and 'multiplicity' on the right.</p>	<p>The composition strengthens the type of aggregation in that way, that the lifetime of the composed element is the same as the composing class, i.e. the structure can be seen as a "composition". In data structures composition is normally seen as an embedded data element.</p>